




BlackBerry Curve 8900 Speaker Replacement

This will guide you on how to disassemble your blackberry curve to replace the broken speaker with a new speaker.

Written By: Johnny Tran

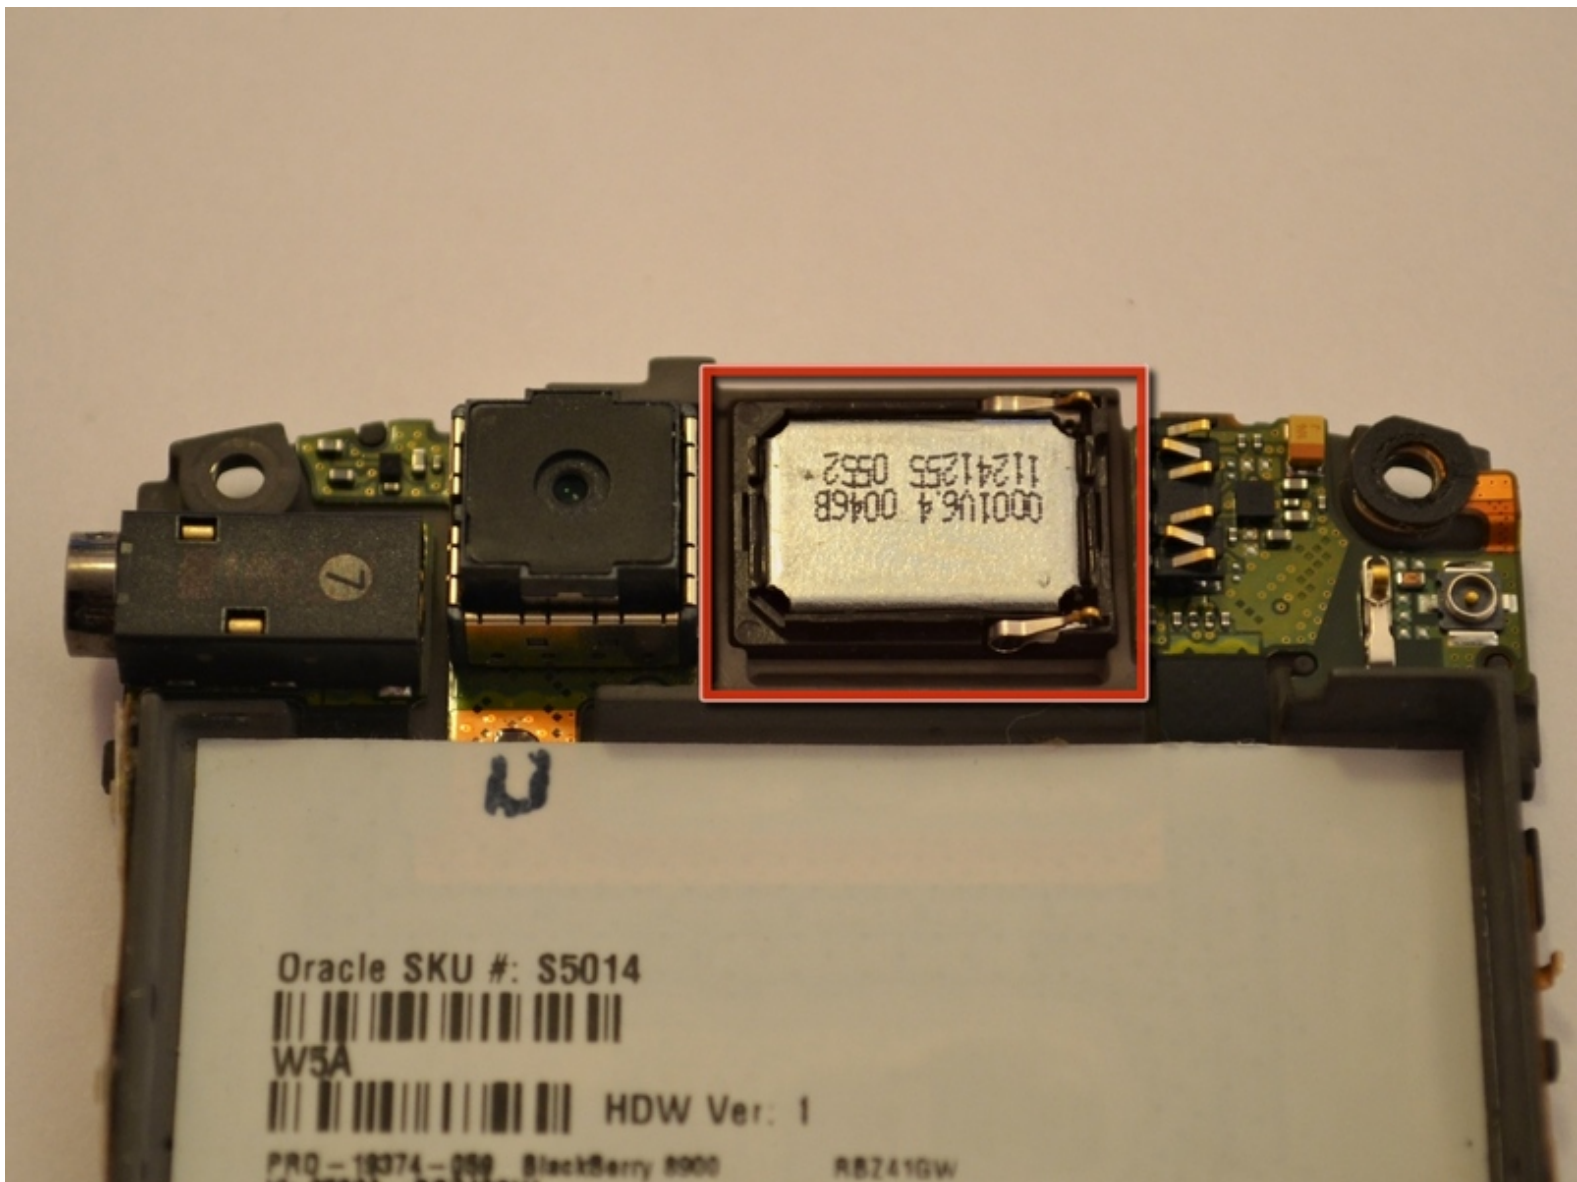



TOOLS:

- [T6 Torx Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)



PARTS:

- [Replacement blackberry curve speaker module](#) (1)

Step 1 — Speaker



- Remove battery cover and battery on the back of the device.

Step 2



- Using a small plastic opening tool, remove the lower rear cover.

Step 3




- Remove six screws from the midframe of the device.

Step 4




- Remove the midframe from the phone.

Step 5

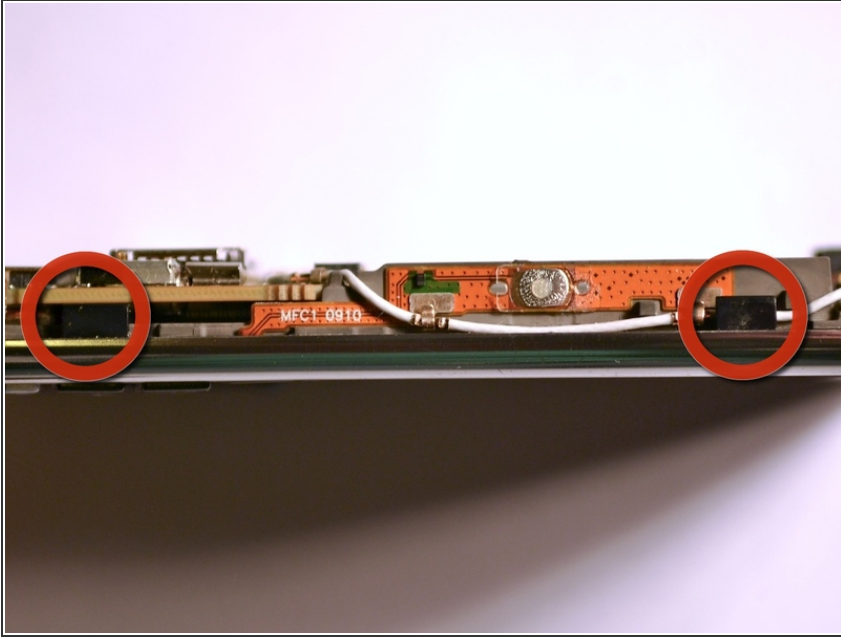



- Gently pry the back the plastic tabs that secure the motherboard to the case.
- Slowly work your way around the case until the tabs until the motherboard comes free.
- Remove the motherboard.
 - ⓘ The keypad and navigation ball may become loose and fall away from the motherboard.

Step 6

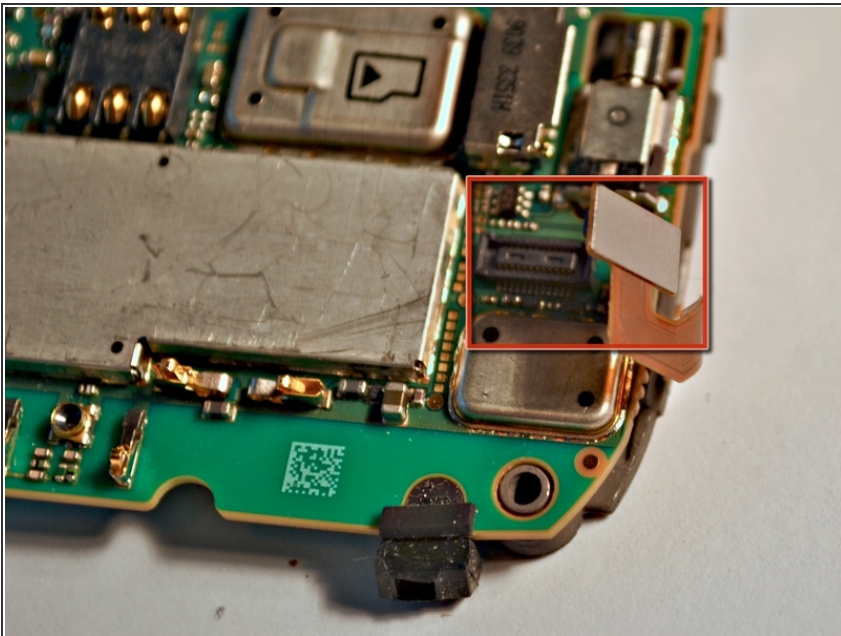



- Detach the ribbon cable on the front of the motherboard.

Step 7

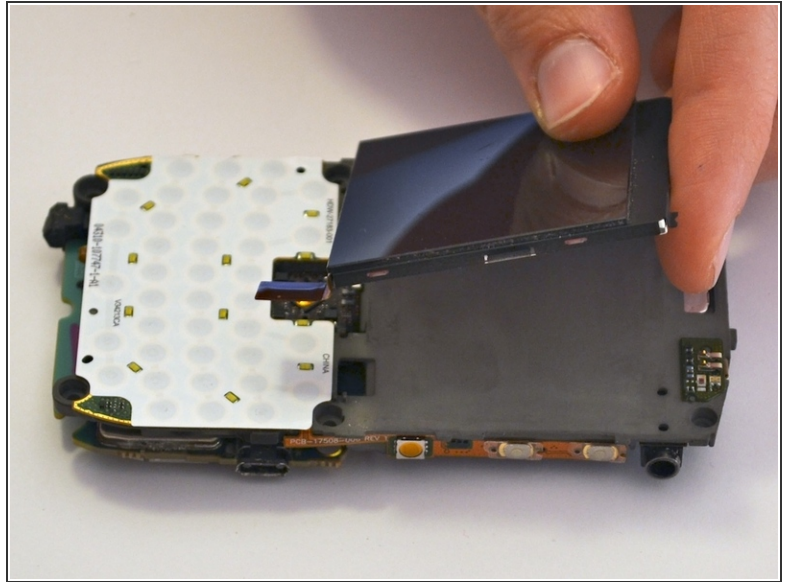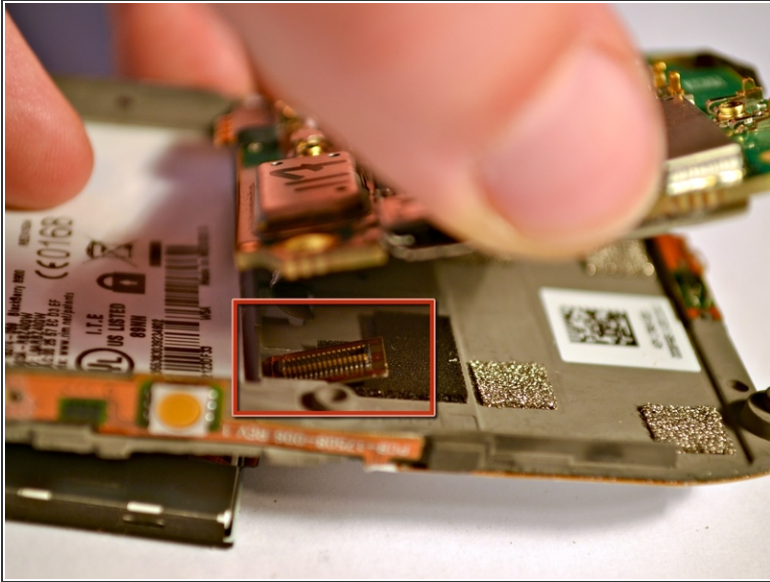



- Remove the screen to keep it from being damaged.

Step 8

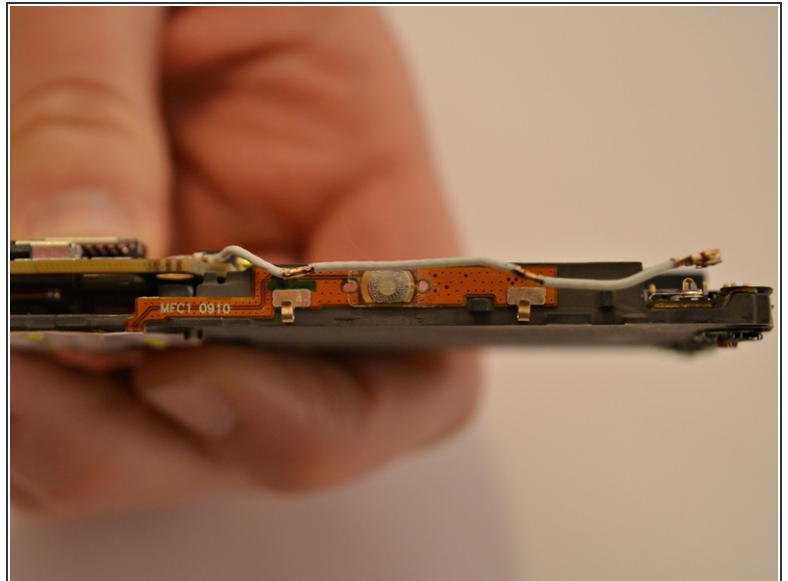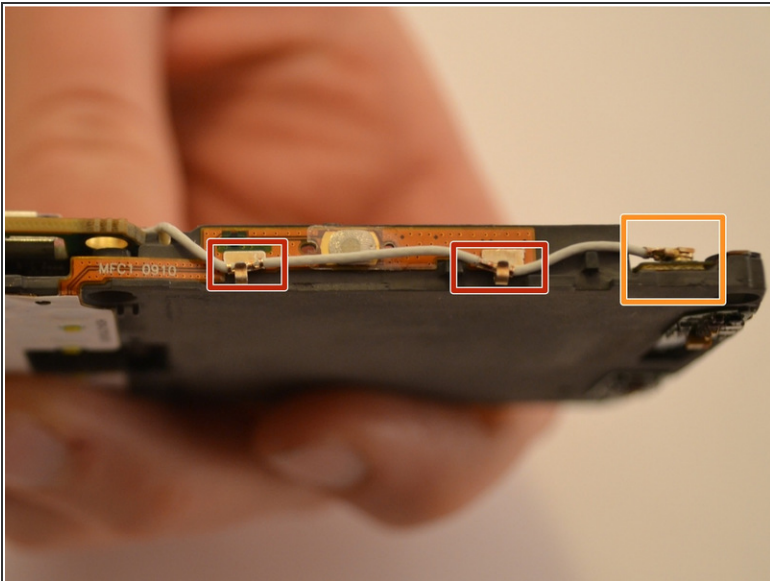


- Carefully detach the antenna from the two clips on the side of the motherboard.
- Carefully disconnect the antenna from the motherboard.

Step 9

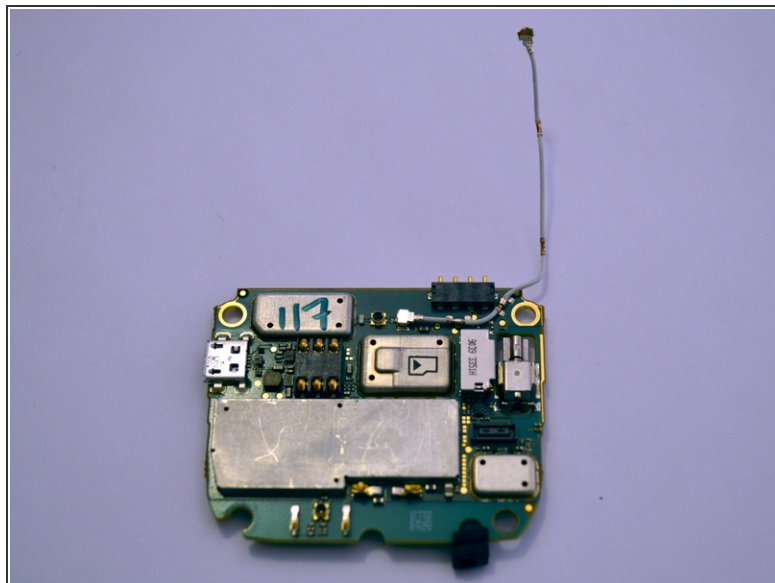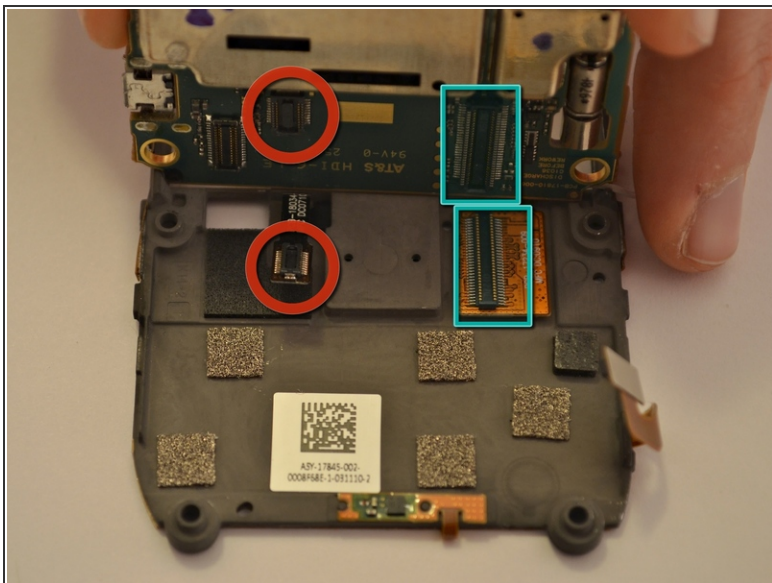

- Lift the up motherboard from the bottom edge to reveal to ribbon cables.
- Carefully disconnect the two ribbon cables connecting the motherboard and display.
- Remove the motherboard.

Step 10

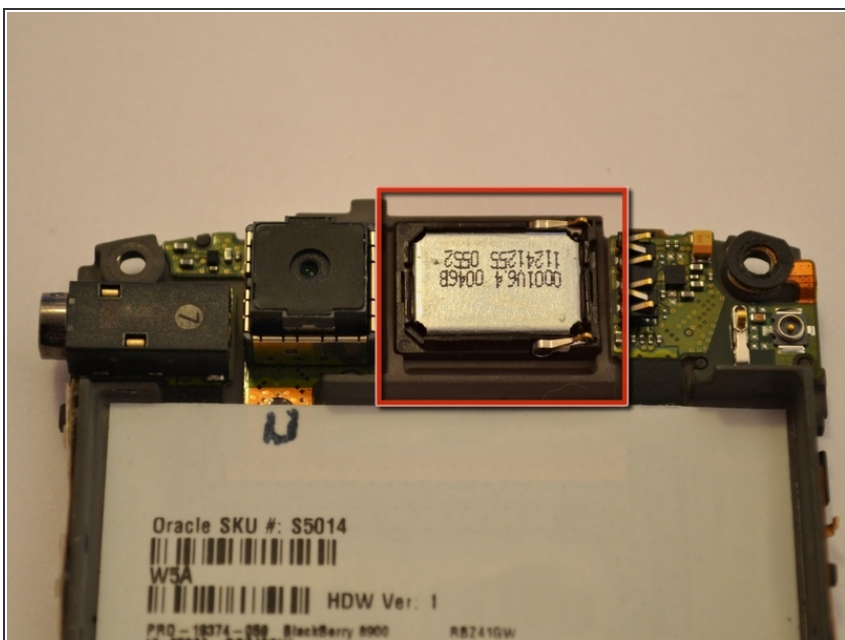

- Replace the entire center piece of the case to replace the speaker.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 05:33:57 AM.